
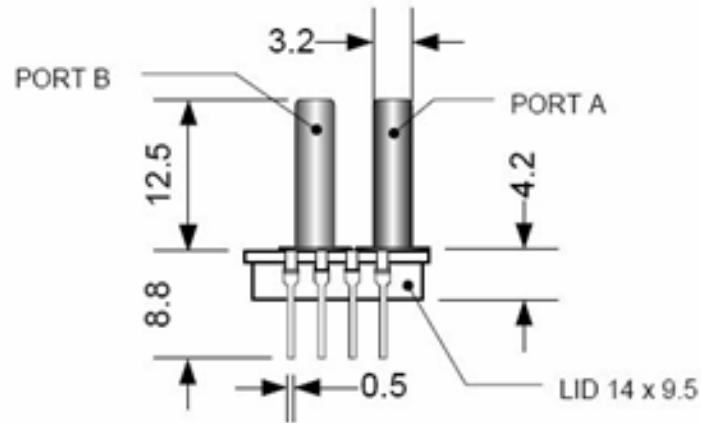


Dimensions

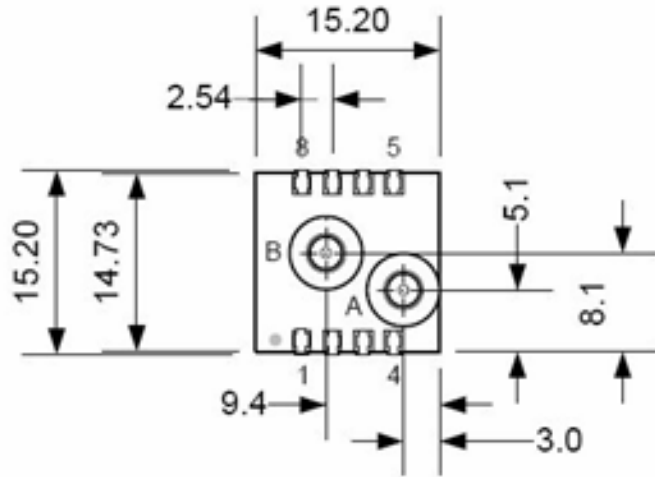

NOTE:

1. Port B is used for positive differential
2. Port A is not used for gage
3. All dimensions are in mm
4. Tube Length: L=12.45 mm; S=8.45 mm
S is the standard.

AC4065 – AC4066 Pin-outs



Pin #	Description
1	NC
2	Gnd
3	NC
4	SDA
5	SCL
6	NC
7	VDD (Positive Supply)
8	Analog Out

NC = May not be used as an electrical feed-thru. Pins should be soldered to the board but not connected to any other circuitry.